
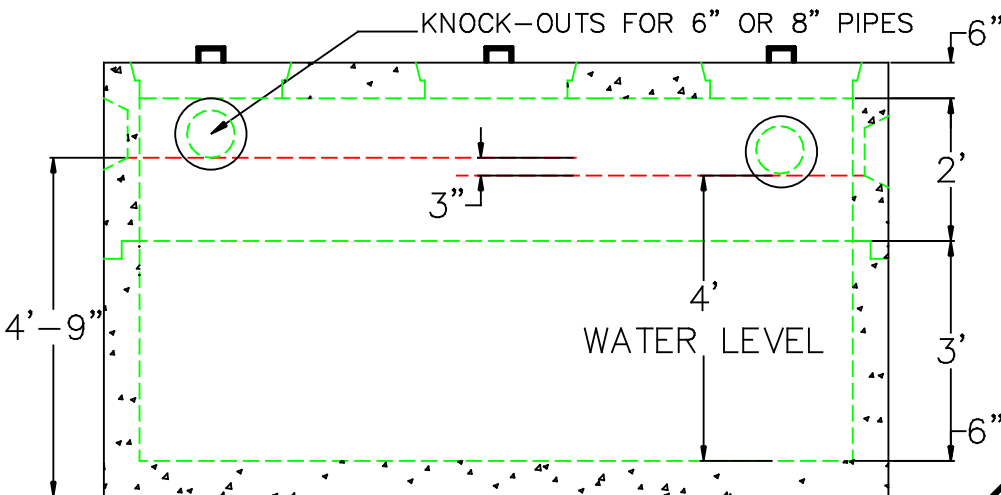


1,500 GALLON SEPTIC TANK

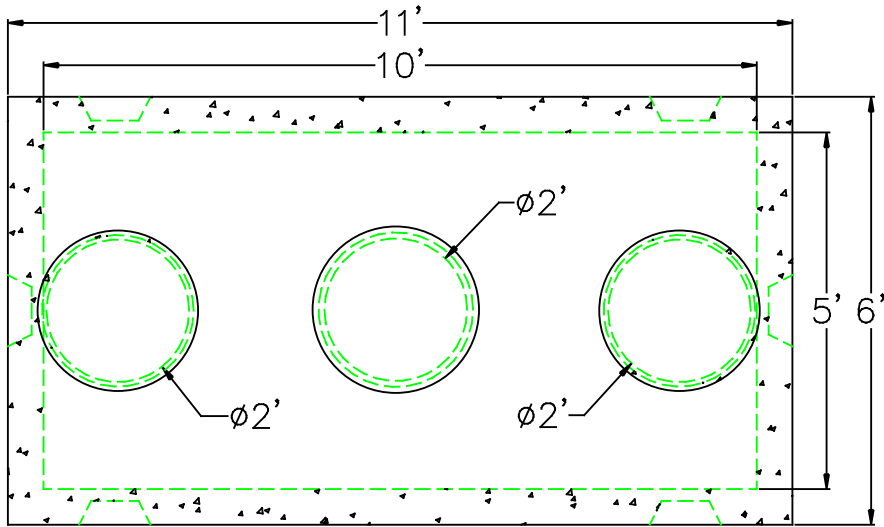


NPCA
Precast... The Concrete Solution.

DESIGN NOTES:

1. CONCRETE 5,000 PSI. @ 28 DAYS
2. HS-20-44 LOADING WITH 12" TO 60" OF COVER
3. REINFORCING ASTM A-615 GRADE 60
4. CONST. JOINT TO HAVE MIN. 1" BUTYL SEALANT

	FLOOR	VERT. FT	FLAT TOP
WEIGHT	4,850 lbs.	2,470 lbs.	6,400 lbs.
VOLUME		375gal.	

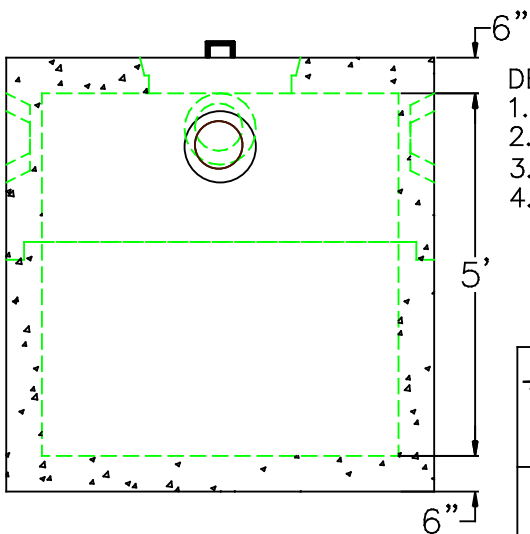

SCITUATE RAY PRECAST
120 CLAY PIT ROAD
MARSHFIELD, MA 02050
PHONE # 1-800-440-0009
FAX # 781-837-4320

CONTRACTOR:

JOB NAME:

DATE:

DRAWING: ST-1.5K-20

DRAWING BY: C. J. SCOTT