48" RCP O-RING JOINT REINFORCED

DESIGN NOTES:

- 1. MFG. IN ACCORDANCE WITH ASTM SPEC. C76 & AASHO SPEC. M170, WALL B.
- 2. CEMENT TYPE II
- 3. CONCRETE STRENGTH CLASS III & IV 4,000psi CLASS V 6,000psi
- 4. CIRCUM. REINFORCEMENT:

CLASS III 0.24 SQ. IN. PER FT. INNER CAGE

0.14 SQ. IN. PER FT. OUTER CAGE


CLASS IV 0.42 SQ. IN. PER FT. INNER CAGE

0.24 SQ. IN. PER FT. OUTER CAGE

CLASS V 0.73 SQ. IN. PER FT. INNER CAGE

0.44 SQ. IN. PER FT. OUTER CAGE

- 5. LAYING LENGTH 8'-0"
- 6. RUBBER GASKET ASTM SPEC. C443

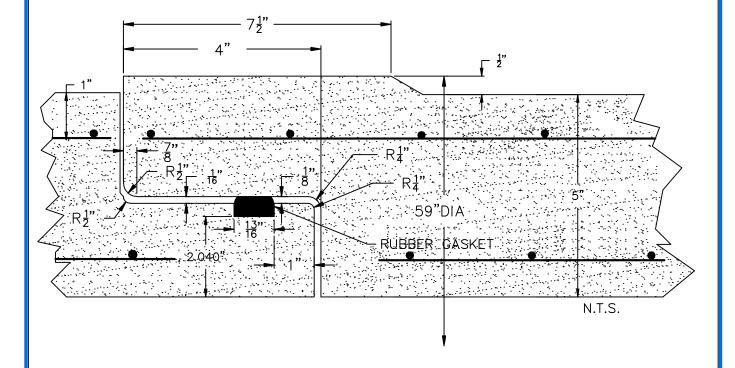



SCITUATE CONCRETE PRODUCTS P.O. BOX 636 120 CLAY PIT RD MARSHFIELD, MA 02050 PHONE # 1-800-322-4488 FAX # 781-545-6021

CONTRACTOR:

JOB NAME:



DATE: APPROVED BY:

DRAWING BY: C.J. SCOTT