


72" RCP O-RING JOINT REINFORCED

DESIGN NOTES:

1. MFG. IN ACCORDANCE WITH ASTM SPEC. C76 & AASHO SPEC. M170, WALL C.
2. CEMENT TYPE II
3. CONCRETE STRENGTH CLASS III 4,000psi and CLASS IV 5,000psi
4. CIRCUM. REINFORCEMENT:
 - CLASS III 0.36 SQ. IN. PER FT. INNER CAGE
 - 0.21 SQ. IN. PER FT. OUTER CAGE
 - CLASS IV 0.60 SQ. IN. PER FT. INNER CAGE
 - 0.36 SQ. IN. PER FT. OUTER CAGE
5. LAYING LENGTH 8'-0"
6. RUBBER GASKET ASTM SPEC. C443

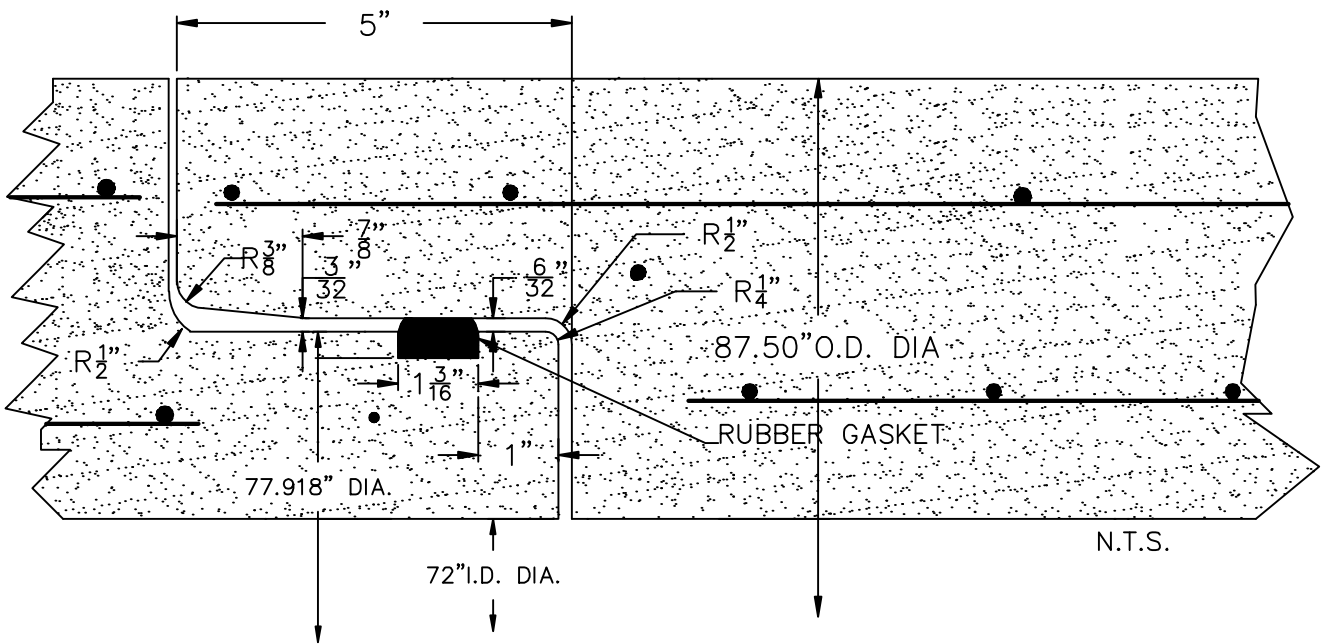


SCITUATE
 CONCRETE PRODUCTS
 SCITUATE CONCRETE PRODUCTS
 P.O. BOX 636 120 CLAY PIT RD
 MARSHFIELD, MA 02050
 PHONE # 1-800-322-4488
 FAX # 781-545-6021

CONTRACTOR:		JOB NAME:	
DATE:	APPROVED BY:	DRAWING BY: C.J. SCOTT	

